

QWIK-CLAMP™ ADJUSTMENT INSTRUCTIONS

ADJUSTING 3-IN-1 DECK CLEARANCE WITH PHILLIPS INDUSTRIES QWIK-CLAMP™

NOTE BEFORE ADJUSTING:

Only the 2nd clamp needs to be adjusted, (the clamp closest to the trailer side of the assembly). Work in 1-2" increments while adjusting. See **Fig. 3** on back.

TO OPEN THE QWIK-CLAMP™:

1. Use index finger and thumb to grip bottom part of the latch & pull it up to release tension. **Fig. 1.**
2. The clamp does not need to be completely removed to adjust its positioning on the assembly.




Fig. 1



ADJUSTING 3-IN-1 ASSEMBLY DECK CLEARANCE:

1. To **increase** deck clearance, adjust the 2nd clamp by moving it towards the **trailer side** of the assembly.
2. To **reduce** deck clearance, adjust the 2nd clamp by moving it towards the **tractor side** of the assembly.

Fig. 2

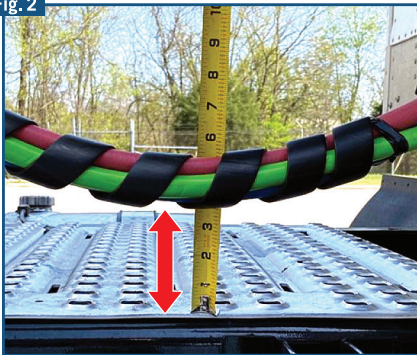

NOTE:

Switching from van to chassis trailers with center connections may require adjustment.

Fig. 2. 3-6" deck clearance is recommended when connected.

Fig. 3

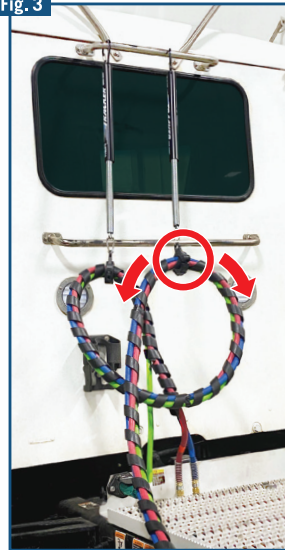


Fig. 3. Only adjust the 2nd clamp.